


Photo



Drawing

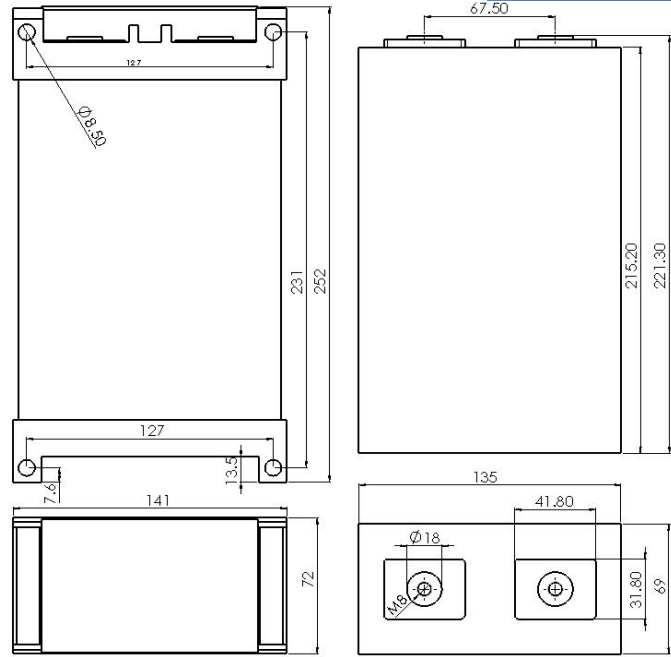

Nominal Capacity		210Ah@0.3C Discharging
Minimum Capacity		210Ah@0.3C Discharging
Nominal Voltage		3.7V
Internal Resistance		≤0.1mΩ
Charging(CC-CV)	Charging Current	1.5C continuous / 2C peak
	Charging Upper Limit Voltage	4.2V
Discharging	Discharging Current	3C continuous/5C(10S ≥20% SOC, 25°C)
	Discharging Cut-off Voltage	3.0V
Charging Time	Standard Charging	45 minutes
	Quick-acting Charging	30 minutes
Operation Temperature	Charging	0°C~45°C
	Discharging	-20°C~55°C
Weight		4.10Kg
Size / with Plastic Holders		69x135x235mm/ 72x141x252mm
Shell Material		Aluminium alloy metal case

